




# Redpath Air Pipe Flange Installation




Parts required

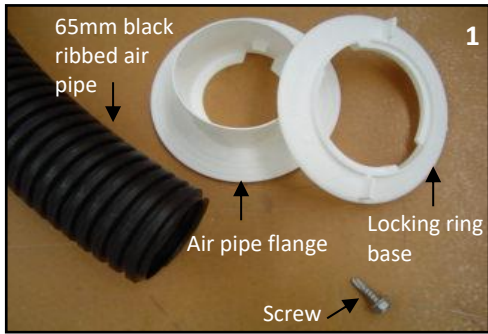


Mark a 60mm hole onto the inside twinskin cover at least 1 meter away from any of the films edges




Cut out the 60mm hole, taking care not to accidentally cut the outer twinskin cover.

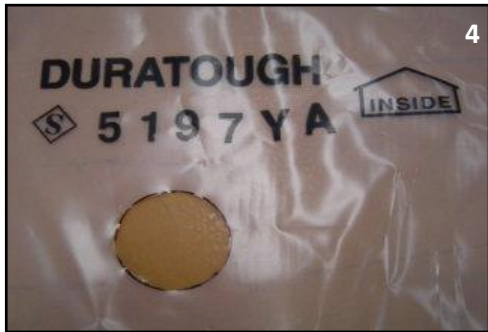

Hole cut

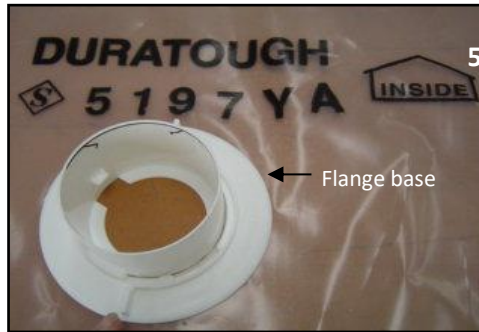

Position the first part of the Flange base as shown. The 73mm upstand should protrude into the greenhouse.

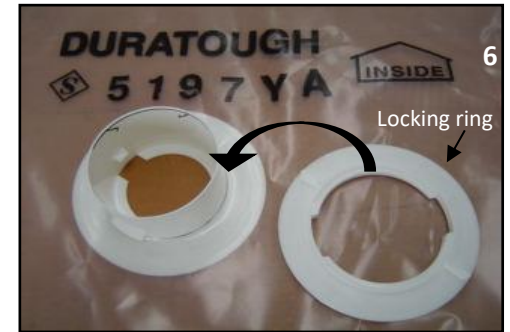

Position the locking ring over the flange base & by turning to lock it into place trapping the plastic film




Plug in 65mm Air Pipe & ensure it "clicks" into the flanges internal locking lugs.

Cut the pipe at its widest segment point. Cut at 90°

Note:  
When plugging in the Air Pipe keep it as close as possible to a 90° angle (relevant to the cover).



Position a Tek screw to secure all of the parts together in case of high wind load

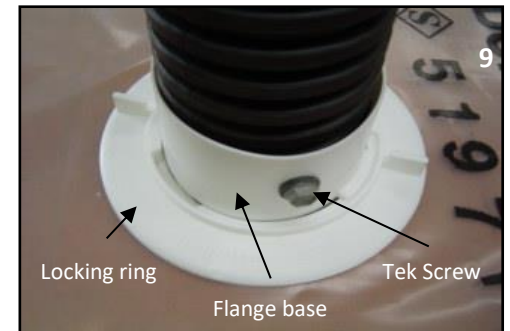

Finished item